
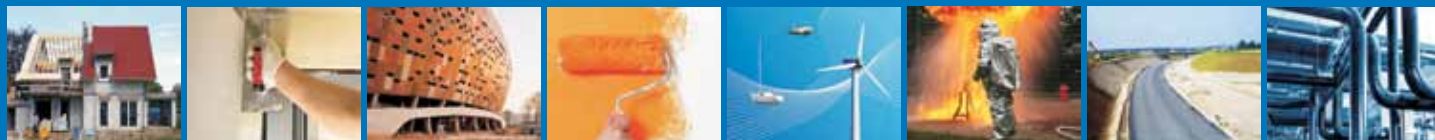


Dr. Günther Kast GmbH & Co.


Technische Gewebe Spezial-Fasererzeugnisse KG




TECHNICAL DATASHEET

IN 3468

Article description	Tolerance +/-		testing method	
	IN 3468			
Finished weight (g/m²)	50		DIN EN 12127	
Coating (g/m²)	10		DIN EN 12127	
Aperture size (mmxmm)	warp	weft		
	2,9	2,3	0,2	
Yarn count (yarns/10 cm)	32	35	0,5	DIN EN 12127
Tensile strength (N/5 cm)				
Original strength	>450	>800	Ø	DIN EN ISO 13934-1
Elongation (%)	2,4	3,3		
Coating type	SBR-Latex			
Thickness (mm)	-		ISO 4603	
Weave	-		DIN 61101-1 + DIN ISO 9354	
Standard measurement (cmxm)	125		100	
SGF	50210	Version-Nr.	40001130809	



Our application recommendations are based on experience. Any liability due to these recommendations is excluded. The buyer must verify whether our products are suitable for the intended end-use. We reserve the right regarding changement of technical values, the illustration and text passages as well as for errors. Older technical datasheet versions are replaced by this new version.



TECHNICAL DATASHEET

IN 3468

Non-adhesive version available in the following dimensions.

5 cm x 20 m
5 cm x 25 m
5 cm x 45 m
5 cm x 90 m
10 cm x 90 m

100 cm x 50 m
100 cm x 100 m

Adhesive version available in the following dimensions.

5 cm x 20 m
5 cm x 25 m
5 cm x 45 m
5 cm x 90 m
10 cm x 90 m

Other dimensions on request.

ADVICE FOR PROCESSING AND STORING:

The surface which shall be reinforced has to be prepared according to VOB, part C, DIN 18363, DIN 18350. The subsurface has to be dry and dust-free. If necessary, a ground coat has to be made. The obligatory information of the manufacturer or system provider are valid.

Afterwards IN 3468 has to be rolled up central over the joint which has to be reinforced and pressed on it. Joint tape edge at least 5 cm overlapping. After that, please apply appropriate filler through the joint tape and flatten it professionally.

Please mind the corresponding requirements for further surface formation according to DIN 18202 when processing.